arXiv:1301.6956v1 [cs.IT] 29 Jan 2013

The Capacity of Wireless Channels: A Physical Approach

Wonseok Jeon
Department of EE, KAIST
Daejeon, Korea
Email: wonsjeon@kaist.ac.kr

Sae-Young Chung
Department of EE, KAIST
Daejeon, Korea
Email: sychung@ee.kaist.ac.kr

***Abstract*—In this paper, the capacity of wireless channels is characterized based on electromagnetic and antenna theory with only minimal assumptions. We assume the transmit antenna array of arbitrary configuration is confined in a spherical region and the receive antenna array is isotropically uniform. The capacity is shown as $(\alpha P/N_0)\log e$, where αP is the total received power and N_0 is the noise spectral density. Surprisingly, our result shows the capacity is irrespective of the size of the transmit antenna array against conventional belief, and is only limited by the received power not by the degrees of freedom.**

I. INTRODUCTION

The capacity of multiple-input multiple-output (MIMO) channels has been considered to be severely limited by the size of antenna arrays. The capacity scaling for a three-dimensional network [1] and the degree-of-freedom analysis for a polarimetric antenna array [2] were provided based on the spherical vector wave decomposition, and both showed the number of usable channels is proportional to the surface area enclosing the transmitter.

There have been a lot of attempts to squeeze more antennas into a given space. For example, polarimetric antennas were used to get degrees-of-freedom and multiplexing gain by using the wave polarization [2], [3], [4]. Also, the MIMO cube was introduced, which consists of twelve dipoles located on the edges of the cube to increase the degree of freedom in a limited space [5], [6]. Besides, it was recently shown that even when the antenna spacing at the receiver is negligibly small, two degrees of freedom can be achieved for a two-user multiple access channel, which was previously thought impossible [7].

In this paper, we attempt to characterize the ultimate limit of wireless communication by deriving the capacity of wireless channels with only minimal assumptions. We assume the transmit antennas are confined inside a sphere of a certain radius but otherwise completely arbitrary and assume the total transmit power is constrained to be P. We also assume arbitrarily many receive antennas so that they do not become a bottleneck. We show the capacity is given by $(\alpha P/N_0)\log e$, where αP is the total received power and N_0 is the noise power spectral density. Interestingly, the capacity is irrespective of the size of the source region, which is due the availability of arbitrarily many spectral modes of equal quality. However, as the spectral mode index increases, the radiation resistance tends to zero, which would make practical design of antennas harder. If we only use spectral modes with big enough radiation resistance, then we recover the result in [2], i.e., the degrees of freedom is proportional to the surface area of the source.

The following notations are used: $(\cdot)^*$, $(\cdot)^t$ and $(\cdot)^\dagger$ are vector complex conjugate, matrix transpose, and matrix conjugate-transpose. $j_n^{(1)}(\cdot)$ and $h_n^{(1)}(\cdot)$ denote the spherical bessel function of the first and the third kind, $Y_{nm}(\cdot,\cdot)$ is the spherical harmonics. The unit vectors on the spherical coordinate are $\hat{\mathbf{r}}, \hat{\boldsymbol{\theta}}$ and $\hat{\boldsymbol{\phi}}$. $\mathbf{I}_n$ is the $n\times n$ identity matrix.

II. RADIATION POWER OVER MODES

A. Known results on singular value decomposition

Assume some current source exists in $V \in \mathbb{R}^3$, and not in V^C. Then, the dyadic Green function $\mathbf{G}(\mathbf{r},\mathbf{r}')$ relates the source current to the electric field on V^C as

$$\mathbf{E}(\mathbf{r}) = i\omega\mu \int_V \mathbf{G}(\mathbf{r},\mathbf{r}')\cdot \mathbf{J}(\mathbf{r}')d\mathbf{r}', \mathbf{r}\in V^C, \tag{1}$$

where $\mathbf{J}(\mathbf{r}')$ represents the current source at $\mathbf{r}'$, ω is the carrier frequency, and μ is the permeability of V^C [8, p.376]. As shown in [2], the Green function can be decomposed into

$$\mathbf{G}(\mathbf{r},\mathbf{r}') = ik\sum_{n=1}^{\infty}\sum_{m=-n}^{n}\sum_{l=1}^{2}\frac{1}{n(n+1)}\mathbf{U}_{nml}(\mathbf{r})\mathbf{V}^*_{nml}(\mathbf{r}'), \tag{2}$$

where k is the wave number and

$$\begin{aligned}
\mathbf{U}_{nm1}(\mathbf{r}) &= \nabla\times \mathbf{r}h_n^{(1)}(kr)Y_{nm}(\theta,\phi),\\
\mathbf{U}_{nm2}(\mathbf{r}) &= \frac{1}{k}\nabla\times\nabla\times \mathbf{r}h_n^{(1)}(kr)Y_{nm}(\theta,\phi),\\
\mathbf{V}_{nm1}(\mathbf{r}) &= \nabla\times \mathbf{r}j_n(kr)Y_{nm}(\theta,\phi),\\
\mathbf{V}_{nm2}(\mathbf{r}) &= \frac{1}{k}\nabla\times\nabla\times \mathbf{r}j_n(kr)Y_{nm}(\theta,\phi).
\end{aligned}$$

Now, assume $V \in \mathbb{R}^3$ is the interior of a sphere with radius R_V and the region of field measurement S is a surface of sphere with radius $R_S > R_V$, where both spheres are centered at the origin as shown in Fig. 1. Defining normalized eigen

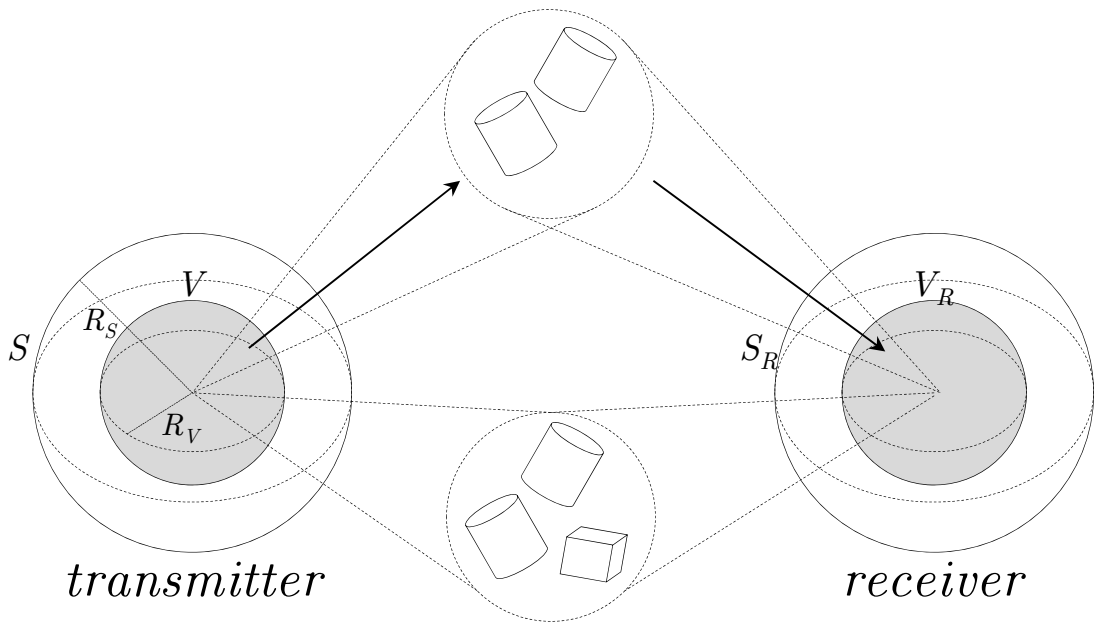

Fig. 1. Illustration on scattering environment.

functions and eigenvalues as

$$\mathbf{u}_{nml}(\mathbf{r}) = \frac{\mathbf{U}_{nml}(\mathbf{r})}{\sqrt{\int_S |\mathbf{U}_{nml}(\mathbf{r})|^2 d\Omega}} \triangleq \frac{1}{C_{nml}}\mathbf{U}_{nml}(\mathbf{r}), \tag{3}$$

$$\mathbf{v}_{nm1}(\mathbf{r}) = \frac{\mathbf{V}_{nml}(\mathbf{r})}{\sqrt{\int_V |\mathbf{V}_{nml}(\mathbf{r})|^2 d\mathbf{r}}},$$

$$\sigma_{nml} = \frac{\sqrt{\int_S |\mathbf{U}_{nml}(\mathbf{r})|^2 d\Omega}\sqrt{\int_V |\mathbf{V}_{nml}(\mathbf{r})|^2 d\mathbf{r}}}{n(n+1)},$$

the Green function can be rewritten as

$$\mathbf{G}(\mathbf{r},\mathbf{r}') = ik\sum_{p=1}^{\infty}\sigma_p \mathbf{u}_p(\mathbf{r})\mathbf{v}_p^*(\mathbf{r}'), \tag{4}$$

where the mode index is defined as

$$p = 2(n(n+1)+m-1)+l$$

for $n \in \mathbb{N}, -n \leq m \leq n, l = 1,2$, so that one-to-one correspondence between (n,m,l) and p exists. The source can be decomposed into [2]

$$\mathbf{J}(\mathbf{r}) = \sum_{p=1}^{\infty} J_p \mathbf{v}_p(\mathbf{r}), \tag{5}$$

where

$$J_p = \int_V \mathbf{J}(\mathbf{r})\cdot\mathbf{v}_p(\mathbf{r})d\mathbf{r}, p \in \mathbb{N} \tag{6}$$

B. Radiation power analysis

Assume modes $p = 1,...,M$ are used. Using (4) and (6), (1) can be rewritten as

$$\begin{aligned}\mathbf{E}(\mathbf{r}) &= -\omega\mu k\sum_{p=1}^{M}\sum_{p'=1}^{M}\sigma_p J_{p'}\mathbf{u}_p(\mathbf{r})\int_V \mathbf{v}_p^*(\mathbf{r}')\cdot\mathbf{v}_{p'}(\mathbf{r}')d\mathbf{r}' \\ &= -\eta k^2\sum_{p=1}^{M}\sigma_p J_p \mathbf{u}_p(\mathbf{r}), \mathbf{r}\in S, \end{aligned} \tag{7}$$

by applying the orthogonality of $\mathbf{v}_p(\mathbf{r})$ and $\omega\mu = \eta k$, where $\eta = 120\pi$ is the wave impedance.

Define a $M\times 1$ channel input $\mathbf{X} = [J_1,...,J_M]^t$, a $M\times M$ matrix $\mathbf{\Sigma} = \operatorname{diag}\{\sigma_1,...,\sigma_M\}$ consisting of singular values, and a $M\times 1$ vector $\mathbf{\Psi}(\mathbf{r}) = [\mathbf{u}_1(\mathbf{r}),...,\mathbf{u}_M(\mathbf{r})]^t$. Then,

$$\mathbf{E}(\mathbf{r}) = -\eta k^2\left(\mathbf{\Psi}(\mathbf{r})\right)^t\mathbf{\Sigma}\mathbf{X}, \mathbf{r}\in S. \tag{8}$$

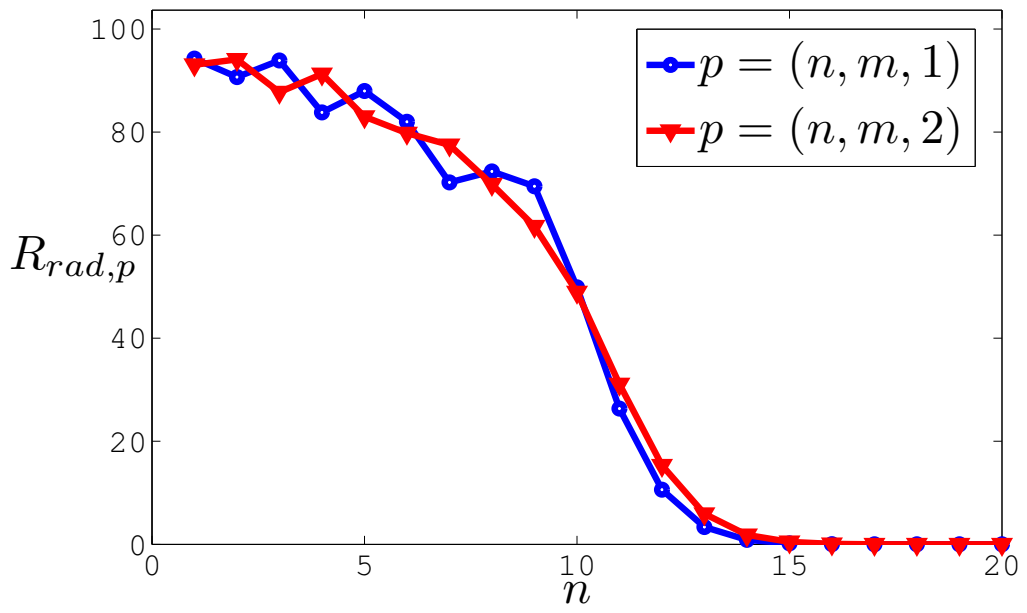

Fig. 2. Radiation resistance over modes when $R_V = 2\lambda$.

Using the definition above, the following theorem can be derived.

Theorem 1. The amount of power leaving the surface S generated from the field given in (8) is

$$\frac{\eta k^2}{2}\mathbf{X}^\dagger\mathbf{\Sigma}^2\mathbf{T}^2\mathbf{X} \tag{9}$$

where $\mathbf{T} \triangleq \operatorname{diag}\left\{1/\sqrt{\tau_1},...,1/\sqrt{\tau_M}\right\}$ and

$$\tau_p \triangleq \begin{cases}\left|h_n^{(1)}(kR_S)\right|^2, p = 1,3,..., \\ \frac{n+1}{2n+1}\left|h_{n-1}^{(1)}(kR_S)\right|^2 + \frac{n}{2n+1}\left|h_{n+1}^{(1)}(kR_S)\right|^2, \\ p = 2,4,..., \end{cases}$$

where n is a corresponding index for each $p = (n,m,l)$. The proof is in Appendix A.

Definition 1. The *radiation resistance* $R_{rad,p}$ for each mode $p = 1,2,...,$ is defined as

$$R_{rad,p} = \frac{\eta k^2\sigma_p^2}{2R_V\tau_p}\,[\text{Ohm}].$$

Note that the radiation resistance is irrelevant to R_S. It decreases as n increases as shown in Fig. 2.

Remark 1. The radiation power on mode $p = 1,2,...,$ can be represented as $P_p = R_{rad,p}\left|J_p\right|^2 R_V$.

III. SYSTEM MODEL

A. Power constraint

Suppose signals are transmitted via different modes over $\bar{n}$ channel uses, and the source exists in V as shown in Fig. 3(a). Also, assume codewords are $\mathbf{x}^{\bar{n}}(\bar{m}) = (\mathbf{x}_1(\bar{m}),...,\mathbf{x}_{\bar{n}}(\bar{m})), \bar{m} \in \left\{1,...,2^{\bar{n}\mathrm{R}}\right\}$ where R is the transmission rate, and $\mathbf{x}_{\bar{i}}(\bar{m}), \bar{m} \in \left\{1,...,2^{\bar{n}\mathrm{R}}\right\}$, is the channel input at time $\bar{i} \in \{1,...,\bar{n}\}$ based on the definition in II-B. Applying **Theorem 1**, an average radiation power constraint can be defined as

$$\frac{\eta k^2}{2}\sum_{\bar{i}=1}^{\bar{n}}\mathbf{x}_{\bar{i}}^\dagger(\bar{m})\mathbf{\Sigma}^2\mathbf{T}^2\mathbf{x}_{\bar{i}}(\bar{m}) \leq \bar{n}P, \bar{m}\in\left\{1,...,2^{\bar{n}\mathrm{R}}\right\}. \tag{10}$$

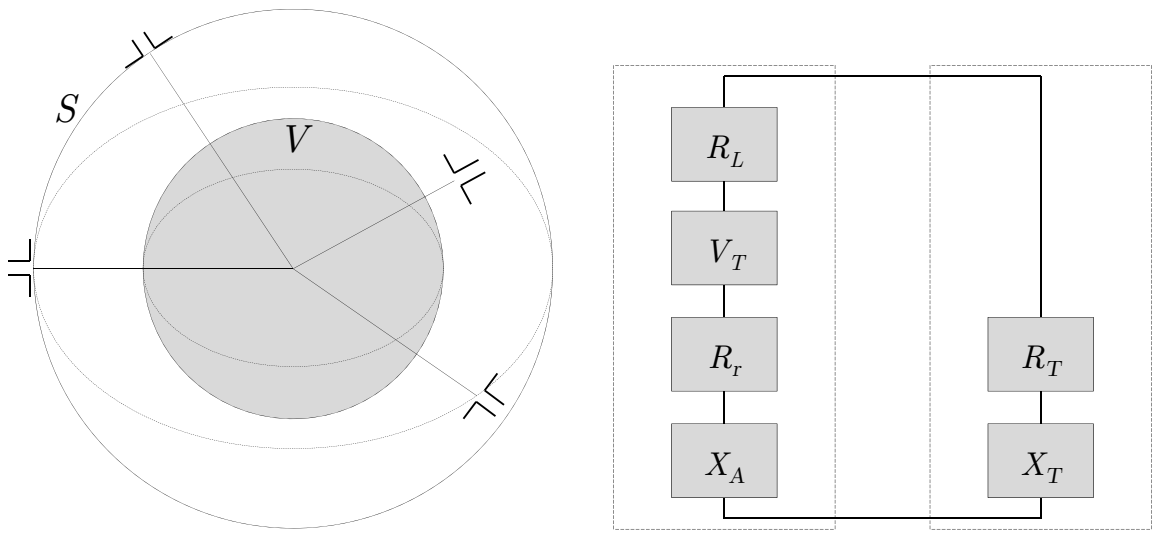

(a) (b)

Fig. 3. Illustration of how receiving antennas work. (a) Receiving short dipole antennas uniformly distributed on S (b) Equivalent Thevenin circuit for short dipoles. The left half models the antenna, while the right half is the load.

B. Receiver

Based on the assumptions in Section II, the electric field generated by the current in V carries the information traveling through S. In wireless communication, after dispersion and reflection, it finally arrives at the receiver as shown in Fig. 1, where the receiver is confined in a spherical region V_R and S_R is a sphere surrounding V_R.

The overall channel has three parts, from V to S, from S to S_R, and from S_R to V_R. For simplicity, we assume the receive antennas (short dipole antennas) are located on S instead in V_R as shown in Fig. 3(a) and characterize the capacity of the channel from the source in V to the receive antennas on S[1].

Let $\mathbf{s}_q = (R_S, \theta_q, \phi_q)$, $q = 1, \ldots, N$ denote the location of the q-th dipole. We assume $N \gg 1$ for sufficient averaging and dipole locations are uniformly chosen on S. Assume the length of the dipole is L and $\mathbf{e}_q$ denote the orientation of the q-th dipole for all $q = 1, ..., N$.

Each short dipole can be modeled by an equivalent circuit as depicted in Fig.3(b), where V_T is the voltage coming from the incident wave, R_r is the radiation resistance of the dipole, R_L is the loss resistance, R_T is the resistance of the load, X_A is the antenna reactance, and X_T is the reactance of the load [9, p.84]. We choose $R_L = 0, \mathrm{X}_A = -\mathrm{X}_T$ and $R_r + R_L = R_T$ for conjugate matching to deliver the maximum power to the load. Then, the power transmitted to the load resistor is

$$P_T = \frac{|V_T|^2}{8R_T}.$$

C. Channel construction

Define the receive signals without noise as

$$y_q = \frac{V_{Tq}}{\sqrt{8R_{Tq}}}, q = 1, ..., N, \tag{11}$$

so that its square is the received power by the load of the q-th antenna. In addition,

$$R_{T_q} = R_{r_q} = 80 \left(\frac{\pi L}{\lambda}\right)^2, q = 1, ..., N, \tag{12}$$

Due to the uniform current density, we have

$$V_{Tq} = E_q L, q = 1, ..., N. \tag{13}$$

where

$$E_q = \mathbf{E}(\mathbf{s}_q) \cdot \mathbf{e}_q, q = 1, ..., N,$$

assuming the incident field is a *plane wave* [9, p.91]. Including the thermal noise across R_T, the received signal can be rewritten as

$$\begin{aligned} y_q &= \frac{V_{Tq}}{\sqrt{8R_{Tq}}} + z_q \\ &= \frac{\lambda}{\sqrt{640\pi}} \mathbf{E}(\mathbf{s}_q) \cdot \mathbf{e}_q + z_q \\ &= -\frac{\eta k}{\sqrt{160}} \sum_{p=1}^{\infty} (\mathbf{u}_p(\mathbf{s}_q) \cdot \mathbf{e}_q)\, \sigma_p J_p + z_q, q = 1, ..., N, \end{aligned}$$

which follows by using (7). Using the matrix representation, we have a Gaussian vector channel given as

$$\begin{aligned} \mathbf{Y} &= -\frac{\eta k}{\sqrt{160}} \mathbf{\Phi} \mathbf{\Sigma} \mathbf{X} + \mathbf{Z} \\ &\triangleq \mathbf{G}\mathbf{X} + \mathbf{Z}, \end{aligned} \tag{14}$$

where $\mathbf{Y} = [y_1, ..., y_N]^t, \mathbf{\Phi} = [\boldsymbol{\phi}_1, ..., \boldsymbol{\phi}_M], \mathbf{Z} = [z_1, ..., z_N]^t$ such that $\forall p = 1, 2, ..., \boldsymbol{\phi}_p = [\mathbf{u}_p(\mathbf{s}_1) \cdot \mathbf{e}_1, ..., \mathbf{u}_p(\mathbf{s}_N) \cdot \mathbf{e}_N]^t$. We assume $\mathbf{Z} \sim \mathcal{CN}(0, N_0 W \mathbf{I}_N)$ where N_0 is the noise spectral density, and W is the channel bandwidth.

IV. CAPACITY UPPER BOUND

Assume a total of N points are uniformly sampled on S, where N is assumed to be a multiple of 3. We assume the orientation of each dipole is given as

$$\mathbf{e}_q = \begin{cases} \hat{\boldsymbol{r}}, & q = 1, 4, ..., N-2, \\ \hat{\boldsymbol{\theta}}, & q = 2, 5, ..., N-1, \\ \hat{\boldsymbol{\phi}}, & q = 3, 6, ..., N. \end{cases}$$

A. Approximated channel capacity

Using the channel given in (14), the channel capacity is

$$\begin{aligned} C &= \max_{\mathbf{K}_{\tilde{\mathbf{X}}}: \mathrm{tr}(\mathbf{K}_{\tilde{\mathbf{X}}}) \le P} W \log \left| \mathbf{I}_N + \frac{1}{N_W} \mathbf{G} \mathbf{K}_{\mathbf{X}} \mathbf{G}^\dagger \right| \\ &= \max_{\mathbf{K}_{\tilde{\mathbf{X}}}: \mathrm{tr}(\mathbf{K}_{\tilde{\mathbf{X}}}) \le P} W \log \left| \mathbf{I}_N + \frac{1}{N_W} \frac{3\pi}{2} \mathbf{\Phi} \mathbf{T}^{-1} \mathbf{K}_{\tilde{\mathbf{X}}} \mathbf{T}^{-1} \mathbf{\Phi}^\dagger \right| \qquad (15) \\ &= \max_{\mathbf{K}_{\tilde{\mathbf{X}}}: \mathrm{tr}(\mathbf{K}_{\tilde{\mathbf{X}}}) \le P} W \log \left| \mathbf{I}_M + \frac{1}{N_W} \frac{3\pi}{2} \mathbf{T}^{-1} \mathbf{\Phi}^\dagger \mathbf{\Phi} \mathbf{T}^{-1} \mathbf{K}_{\tilde{\mathbf{X}}} \right|, \qquad (16) \end{aligned}$$

where (15) follows since $\mathbf{K}_{\tilde{\mathbf{X}}} = \frac{\eta k^2}{2} \mathbf{T} \mathbf{\Sigma} \mathbf{K}_{\mathbf{X}} \mathbf{\Sigma} \mathbf{T}$ by assuming $\tilde{\mathbf{X}} = \sqrt{\frac{\eta k^2}{2}} \mathbf{T} \mathbf{\Sigma} \mathbf{X}, N_W = N_0 W$, and (16) follows since $|\mathbf{I}_N + \mathbf{A}\mathbf{B}| = |\mathbf{I}_M + \mathbf{B}\mathbf{A}|$. Also, we have

$$\boldsymbol{\phi}_p^\dagger \boldsymbol{\phi}_{p'} = \sum_{q=1}^{N} \{\mathbf{u}_p(\mathbf{s}_q) \cdot \mathbf{e}_q\}^* \{\mathbf{u}_{p'}(\mathbf{s}_q) \cdot \mathbf{e}_q\}.$$

---

[1] Note that the path from S_R to V_R can be analyzed similarly as that from V to S and the path from S to S_R is a simple scattering environment. This gives the motivation for the simplification.

Using (3) and basic calculus, we have

$$\begin{aligned}&\int_S \mathbf{u}_p^*(\mathbf{r})\cdot\mathbf{u}_{p'}(\mathbf{r})d\Omega\\&=\lim_{N\to\infty}\sum_{q=1}^{N}\left\{\mathbf{u}_p(\mathbf{s}_q)\cdot\mathbf{e}_q\right\}^*\left\{\mathbf{u}_{p'}(\mathbf{s}_q)\cdot\mathbf{e}_q\right\}\frac{4\pi}{(N/3)}\\&=\delta_{pp'},\forall p,p'=1,2,....\end{aligned}$$

Since

$$\boldsymbol{\phi}_p^\dagger\boldsymbol{\phi}_{p'}=\frac{N}{12\pi}\delta_{pp'}+o\left(N\right),\forall p,p'=1,...,M, \tag{17}$$

continuing from (16), we get for sufficiently large N,

$$C=\max_{\mathbf{K}_{\tilde{\mathbf{X}}}:\mathrm{tr}(\mathbf{K}_{\tilde{\mathbf{X}}})\le P}W\log\left|\mathbf{I}_M+\frac{1}{N_W}\frac{N}{8}\mathbf{T}^{-2}\mathbf{K}_{\tilde{\mathbf{X}}}\right|. \tag{18}$$

B. Upper bound

Since the field is measured based on the plane wave assumption, M should be appropriately chosen so that each dipole antenna receives an *asymptotic plane wave*, even if the wave itself is spherical. Note that this restriction on M does not hurt the capacity since we later let R_S tend to infinity and thus M can also tend to infinity. In order to satisfy the condition, the incident wave should asymptotically be *transverse electromagnetic (TEM) wave* near the receiving region. In [10, p.925],

$$\begin{aligned}h_n^{(1)}(kR_S)&=(-i)^{n+1}\frac{e^{ikR_S}}{kR_S}\sum_{m=0}^{n}\frac{i^m}{2^m m!(kR_S)^m}\frac{(n+m)!}{(n-m)!}\\&=(-i)^{n+1}\frac{e^{ikR_S}}{kR_S}\left[1+\mathcal{O}\left(\frac{n^2}{kR_S}\right)\right],\end{aligned} \tag{19}$$

where (19) follows when $kR_S\gg n^2$, and it is sufficient to satisfy the TEM condition.

Definition 2. Assume the total radiation power is P and the total power received on the antenna is P_R. Then, *total effective sold angle* Ω_e is

$$\Omega_e=4\pi\times\frac{P_R}{P}. \tag{20}$$

Theorem 2. With a total radiation power constraint P, the capacity is given as

$$C=\frac{\alpha P}{N_0}\log e,$$

where $\alpha=\frac{\Omega_e}{4\pi},0\le\alpha\le 1$.

Proof: The sum of the power received on dipoles is

$$\begin{aligned}\sum_{q=1}^{3N}|y_q|^2&=\frac{\eta^2k^2}{160}\sum_{p=1}^{M}\sum_{p'=1}^{M}\sum_{q=1}^{N}\mathbf{u}_p^*(\mathbf{s}_q)\cdot\mathbf{u}_{p'}(\mathbf{s}_q)\sigma_p^*\sigma_{p'}J_p^*J_{p'}\\&=\frac{\eta^2k^2N}{1920\pi}\sum_{p=1}^{M}\sigma_p^2|J_p|^2,\end{aligned} \tag{21}$$

for sufficiently large N, where (21) follows by (17). Since both transmit and received power are the same in case

$$N=\left\lceil 8k^2R_S^2\right\rceil, \tag{22}$$

we can choose

$$N=\left\lceil 8\alpha k^2R_S^2\right\rceil, \tag{23}$$

in order to separate the dipoles to prevent the coupling effects.

For a given sufficiently large R_S, we can choose n_0 such that $n_0^2\ll kR_S$. Let $M=(n_0-1)(n_0+1)$, which is the number of modes satisfying $n\le n_0-1$. Then, we have

$$\mathbf{T}^{-2}=\frac{1}{k^2R_S^2}\left[1+\mathcal{O}\left(\frac{n^2}{kR_S}\right)\right]\mathbf{I}_M. \tag{24}$$

Now, assume $8\alpha k^2R_S^2$ is an integer for simplicity. Let $n_0=k_0\sqrt{R_S}$ when $k_0\ll k$, and then, $M=k_0^2R_S-1$. By using (23) and (24) ,

$$\begin{aligned}C&=\max_{\mathbf{K}_{\tilde{\mathbf{X}}}:\mathrm{tr}(\mathbf{K}_{\tilde{\mathbf{X}}})\le P}W\log\left|\mathbf{I}_M+\frac{\alpha k^2R_S^2}{N_W}\mathbf{T}^{-2}\mathbf{K}_{\tilde{\mathbf{X}}}\right|\\&=\max_{\mathbf{K}_{\tilde{\mathbf{X}}}:\mathrm{tr}(\mathbf{K}_{\tilde{\mathbf{X}}})\le P}W\log\left|\mathbf{I}_M+\frac{\alpha}{N_W}\mathbf{K}_{\tilde{\mathbf{X}}}\right|\\&=MW\log\left(1+\frac{\alpha P}{MN_W}\right).\\&\to\frac{\alpha P}{N_0}\log e,\end{aligned} \tag{25}$$

as $M\to\infty$ provided that $R_S\to\infty$. Note that we only require $R_S\to\infty$ due to a limitation of our analysis (plane wave assumption for short dipole antennas). We believe our result would hold for any finite $R_S>R_V$. ■

APPENDIX A
PROOF OF (9)

For notational simplicity, if inputs are omitted, $h_n^{(1)},Y_{nm},P_{nm}$ indicate $h_n^{(1)}(kr),Y_{nm}(\theta,\phi),P_{nm}(\cos\theta)$, for all n and m. Both electric and magnetic field on S satisfy the Maxwell equations on the source-free region such that

$$\nabla\times\mathbf{E}=i\omega\mu\mathbf{H}, \tag{26}$$

$$\nabla\times\mathbf{H}=-i\omega\epsilon\mathbf{E}, \tag{27}$$

where ϵ is the permittivity on S [8]. Using (26) and (27), we have

$$\nabla\times\nabla\times\mathbf{E}=k^2\mathbf{E}, \tag{28}$$

From (7) and (26), the magnetic field is given as

$$\mathbf{H}(\mathbf{r})=ik\sum_{p=1}^{\infty}\sigma_pJ_p\nabla\times\mathbf{u}_p(\mathbf{r}).$$

Using (40) and (42) in [2], we know

$$\mathbf{U}_{nm1}(\mathbf{r})=\nabla Y_{nm}\times\hat{\mathbf{r}}rh_n^{(1)},$$

$$\mathbf{U}_{nm2}(\mathbf{r})=\hat{\mathbf{r}}n(n+1)\frac{h_n^{(1)}}{kr}Y_{nm}+\frac{1}{k}\left[h_n^{(1)}+r\frac{dh_n^{(1)}}{dr}\right]\nabla Y_{nm}.$$

Also, (41) and (44) in [2] show

$$\begin{aligned}&C_{nm1}^2=n(n+1)\left|h_n^{(1)}(kR_S)\right|^2,\\&C_{nm2}^2\\&=\frac{n(n+1)^2}{2n+1}\left|h_{n-1}^{(1)}(kR_S)\right|^2+\frac{n^2(n+1)}{2n+1}\left|h_{n+1}^{(1)}(kR_S)\right|^2.\end{aligned}$$

The complex power flow leaving the surface S is

$$P_c = \oint_S \frac{1}{2}\left(\mathbf{E}(\mathbf{r}) \times \mathbf{H}^*(\mathbf{r})\right) \cdot d\mathbf{s} = \frac{i\eta k^3}{2} \sum_{p=1}^{\infty} \sum_{p'=1}^{\infty} \sigma_p \sigma_{p'}^* J_p J_{p'}^* \gamma_{pp'}, \tag{29}$$

where

$$\gamma_{pp'} \triangleq \oint_S \mathbf{u}_p(\mathbf{r}) \times \nabla \times \mathbf{u}_{p'}^*(\mathbf{r}) \cdot d\mathbf{s}.$$

1) $p = (n, m, 1), p' = (n'm', 1)$:

$$\begin{aligned} &C_p C_{p'} \gamma_{pp'} \\ &= k \int \mathbf{U}_{nm1}(\mathbf{r}) \times \mathbf{U}_{n'm'2}^* \cdot \hat{\mathbf{r}} r^2 d\Omega \\ &= k \int \mathbf{U}_{nm1}(\mathbf{r}) \cdot \mathbf{U}_{n'm'2}^* \times \hat{\mathbf{r}} r^2 d\Omega && (30) \\ &= \int r^3 h_n^{(1)} \left[h_{n'}^{(1)} + r \frac{dh_{n'}^{(1)}}{dr}\right]^* \nabla Y_{nm} \times \hat{\mathbf{r}} \cdot \nabla Y_{n'm'}^* \times \hat{\mathbf{r}} d\Omega \\ &= C_p^2 \left\{ R_S + R_S^2 \left(\frac{1}{h_{n'}^{(1)}} \frac{dh_{n'}^{(1)}}{dr}\right)^* \Bigg|_{r=R_S} \right\} \delta_{nn'} \delta_{mm'}, && (31) \end{aligned}$$

where (30) follows by vector identity $(\mathbf{a} \times \mathbf{b}) \cdot \mathbf{c} = \mathbf{a} \cdot (\mathbf{b} \times \mathbf{c})$, and (31) follows since

$$\int \nabla Y_{nm} \times \hat{\mathbf{r}} \cdot \nabla Y_{n'm'}^* \times \hat{\mathbf{r}} d\Omega = \frac{n(n+1)}{r^2} \delta_{nn'} \delta_{mm'},$$

which follows by (9.120) in [11]. Thus,

$$\gamma_{pp'} = \left\{ R_S + R_S^2 \left(\frac{1}{h_{n'}^{(1)}} \frac{dh_{n'}^{(1)}}{dr}\right)^* \Bigg|_{r=R_S} \right\} \delta_{pp'}$$

2) $p = (n, m, 1), p' = (n'm', 2)$:

$$\begin{aligned} \gamma_{pp'} &\propto \oint_S \mathbf{U}_{nm1}(\mathbf{r}) \times \mathbf{U}_{n'm'1}^*(\mathbf{r}) \cdot d\mathbf{s} \\ &\propto \oint_S (\nabla Y_{nm} \times \hat{\mathbf{r}}) \times (\nabla Y_{n'm'}^* \times \hat{\mathbf{r}}) \cdot d\mathbf{s} \\ &\propto \int \nabla Y_{n'm'}^* \cdot (\hat{\mathbf{r}} \times \nabla Y_{nm})\, d\Omega && (32) \\ &\propto \int \hat{\mathbf{r}} \times \nabla Y_{n'm'}^* \cdot \hat{\mathbf{r}} \times (\hat{\mathbf{r}} \times \nabla Y_{nm})\, d\Omega \\ &= 0, && (33) \end{aligned}$$

where (32) follows by vector identity $\mathbf{a} \times (\mathbf{b} \times \mathbf{c}) = (\mathbf{a} \cdot \mathbf{c})\mathbf{b} - (\mathbf{a} \cdot \mathbf{b})\mathbf{c}$, and (33) follows by (9.121) in [11].

3) $p = (n, m, 2), p' = (n'm', 1)$:

$$\begin{aligned} \gamma_{pp'} &\propto \int \mathbf{U}_{nm2}(\mathbf{r}) \times \mathbf{U}_{n'm'2}^*(\mathbf{r}) \cdot \hat{\mathbf{r}} d\Omega \\ &\propto \int \hat{\mathbf{r}} \times \mathbf{U}_{nm2}(\mathbf{r}) \cdot \mathbf{U}_{n'm'2}^*(\mathbf{r}) d\Omega && (34) \\ &= 0, && (35) \end{aligned}$$

where the proof is done similarly as in A-2.

4) $p = (n, m, 2), p' = (n'm', 2)$:

$$\begin{aligned} &C_p C_{p'} \gamma_{pp'} \\ &= k \int \hat{\mathbf{r}} \times \mathbf{U}_{nm2}(\mathbf{r}) \cdot \mathbf{U}_{n'm'1}^*(\mathbf{r}) r^2 d\Omega \\ &= -\int r^3 h_n^{(2)} \left[h_n^{(1)} + r \frac{dh_n^{(1)}}{dr}\right] \nabla Y_{nm} \times \hat{\mathbf{r}} \cdot \nabla Y_{n'm'}^* \times \hat{\mathbf{r}} d\Omega \\ &= -C_{nm1}^2 \left\{ R_S + R_S^2 \left(\frac{1}{h_{n'}^{(1)}} \frac{dh_{n'}^{(1)}}{dr}\right) \Bigg|_{r=R_S} \right\} \delta_{nn'} \delta_{mm'}, \end{aligned}$$

where the proof is similar with (30) and (31). Thus, we get

$$\gamma_{pp'} = -\frac{C_{nm1}^2}{C_p^2} \left\{ R_S + R_S^2 \left(\frac{1}{h_n^{(1)}} \frac{dh_n^{(1)}}{dr}\right) \Bigg|_{r=R_S} \right\} \delta_{pp'} \tag{36}$$

Note that power of each mode is independently generated since $\gamma_{pp'} = 0$ when $p \neq p'$. Assuming

$$T_p = \begin{cases} 1, & p = 1, 3, ..., \\ \frac{\left|h_n^{(1)}(kR_S)\right|^2}{\frac{n+1}{2n+1}\left|h_{n-1}^{(1)}(kR_S)\right|^2 + \frac{n}{2n+1}\left|h_{n+1}^{(1)}(kR_S)\right|^2}, & p = 2, 4, ..., \end{cases}$$

the radiation power is given as

$$\begin{aligned} &\mathfrak{Re}\left\{P_c\right\} \\ &= \frac{\eta k^3 R_S^2}{2} \sum_{p=1}^{\infty} T_p \sigma_p^2 |J_p|^2 \mathfrak{Im} \left\{ \left(\frac{1}{h_n^{(1)}} \frac{dh_n^{(1)}}{dr}\right) \Bigg|_{r=R_S} \right\} \\ &= \frac{\eta k^2}{2} \sum_{p=1}^{\infty} \frac{\sigma_p^2}{\tau_p} |J_p|^2, && (37) \end{aligned}$$

where (37) follows by using

$$\mathfrak{Im} \left\{ \left(\frac{1}{h_n^{(1)}} \frac{dh_n^{(1)}}{dr}\right) \Bigg|_{r=R_S} \right\} = \frac{1}{k^2 R_S^2 |h_n^{(1)}(kR_S)|^2}.$$

REFERENCES

[1] M. Franceschetti, M. D. Migliore, and P. Minero, "The capacity of wireless networks:information-theoretic and physical limits," *IEEE Trans. Inf. Theory*, vol. 55, no. 8, pp. 3413–3424, Aug. 2009.

[2] A. S. Y. Poon and D. N. C. Tse, "Degree-of-freedom gain from using polarimetric antenna elements," *IEEE Trans. Inf. Theory*, vol. 57, no. 9, pp. 5695–5709, Sep. 2011.

[3] M. R. Andrews, P. P. Mitra, and R. deCarvalho, "Tripling the capacity of wireless communications using electromagnetic polarization," *Nature*, vol. 409, no. 8, pp. 316–318, Jan. 2001.

[4] S. H. Chae, S. W. Jeon, and S.-Y. Chung, "On the multiplexing gain of k-user line-of-sight interference channels," *IEEE Trans. Commun.*, vol. 59, no. 10, pp. 2905–2915, Oct. 2011.

[5] M. Gustafsson and S. Nordebo, "Characterization of MIMO antennas using spherical vector waves," *IEEE Trans. Antennas Propagat.*, vol. 54, no. 9, pp. 2679–2682, Sep. 2006.

[6] B. N. Getu and J. B. Andersen, "The MIMO cube-a compact MIMO antenna," *IEEE Trans. Antennas Propagat.*, vol. 4, no. 3, pp. 1136–1141, May 2005.

[7] M. T. Ivrlač and J. A. Nossek, "Gaussian multiple access channel with compact antenna arrays," in *Proc. IEEE International Symposium on Information Theory (ISIT)*, Saint-Petersburg, Russia, 2011.

[8] W. C. Chew, *Waves and Fields in Inhomogeneous Media.* New York:IEEE, 1995.

[9] C. A. Balanis, *Antenna Theory*, 3rd ed. Wiley-Interscience, 2005.

[10] I. S. Gradshteyn and I. M. Ryzhik, *Table of Integrals, Series, and Products*, 7th ed. Academic Press, 2007.

[11] J. D. Jackson, *Classical Electrodynamics*, 3rd ed. Hoboken, NJ:Wiley, 1998.